

SAFETY INSTRUCTIONS



SAFETY INSTRUCTIONS



0, 1, 2, 4, 5b, 7, 8, 9, 11, 12, 15, 16, 17, 20, 21, 22, 23

A

+ 25, 26

B









+ 19

C

INFO-LINE


7⁰⁰ - 20⁰⁰
Mon. - Fri.

PAULMANN LICHT GmbH
Quezinger Feld 2 • D-31832 Springe
www.paulmann.com
☎ +49 (0) 5041 998 389

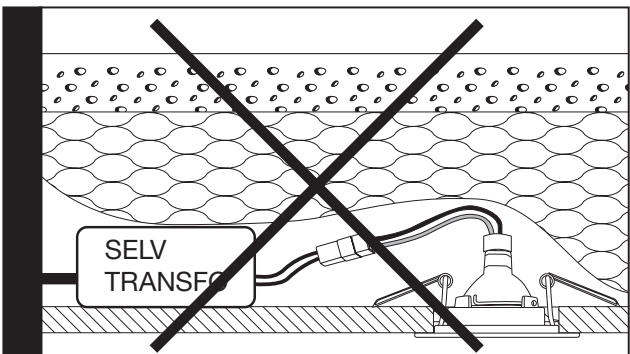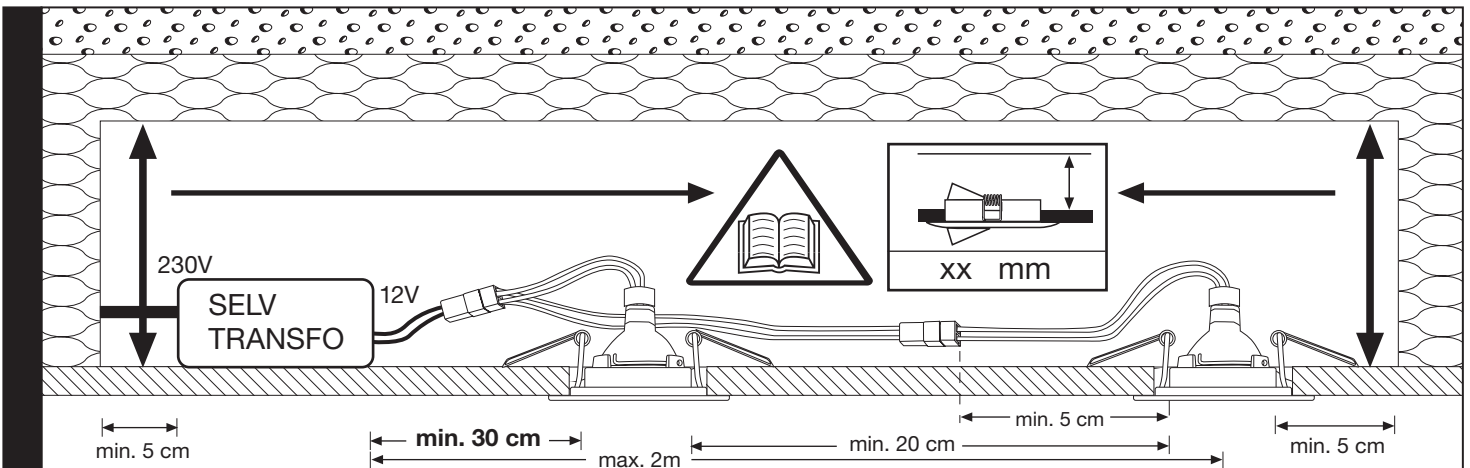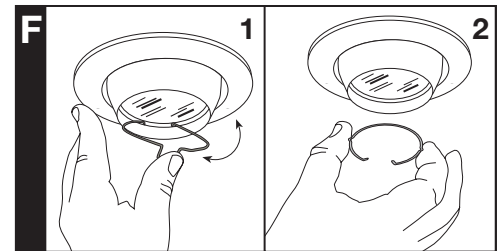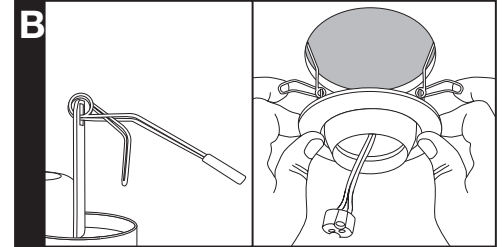

60 % 			COOL BEAM <i>Wärmeverteilung Rpartition de la chaleur Warmteverdeling Heat distribution Distribuci n t rmica</i>
40 % 	20 % 		
80 % 			SECURITY AKZENT

	IP 23		
	IP 44	IP 23	IP 44
	IP 20		

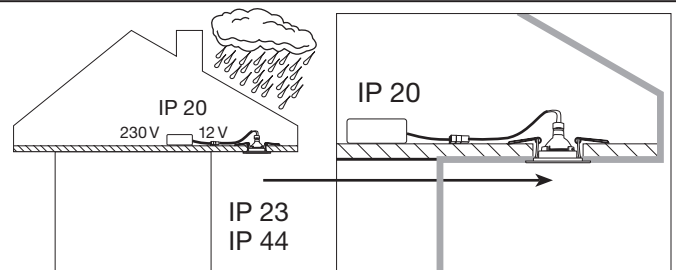

			Akzent Security [W]	Coolbeam [W]	Stifsocket [W]										
	[mm]	[mm]	[W]	[W]	[W]	[mm]	[m]	[mmø]	[mm]	[cm]	[°]	[°]	[mm]	[mm]	
A		110	50	50		51	0,5	92	60	≥ 20	20			8-20	
		85	35	35		35	0,5	64	50	≥ 20	20			5-20	
		83	50	35		51	0,5	73	60	≥ 20				5-20	
		64	35	20		35	0,5	57	50	≥ 20				5-20	
B		69x79	35	35		45x51	0,5	60	$\frac{60}{\sqrt{2}} > 110$	≥ 20				5-20	
		68x68	35	35		37x37	0,5	60	$\frac{64}{\sqrt{2}} > 110$	≥ 20				5-20	
		92	50	35		51	0,5	76	60	≥ 20	20			5-20	
		99	50	35		51	0,5	86	$\frac{60}{\sqrt{2}} > 110$	≥ 20	45			3-20	
		79	50	35		51	0,5	70	$\frac{60}{\sqrt{2}} > 110$	≥ 20				5-20	
		55	35	20		35	0,5	51	$\frac{50}{\sqrt{2}} > 110$	≥ 20				5-20	
		83	50	50		51	0,5	68	$\frac{60}{\sqrt{2}} > 110$	≥ 20	30				5-20
		66	35	20		35	0,5	60	$\frac{50}{\sqrt{2}} > 110$	≥ 20	30				5-20
		91	35	35		51	0,5	73	60	≥ 20	20				5-20
	C		50			20	G4 Gy6,35		40	> 30	≥ 10				5-20
		70			20	G4	0,2	60		≥ 10			> 25	5-20	
		72			20	G4	0,2	64		≥ 10			> 25	5-20	
		66			20	G4	0,2			≥ 10				5-20	
		66			20	G4	0,2	54		≥ 10			> 25	5-20	
		69			20	G4	0,2	60		≥ 10	17		> 25	5-20	